



Round LED Panel Light / Slim
Panel LED Redondo Ultra-fino

TECHNICAL INFORMATION / INFORMACIÓN TÉCNICA

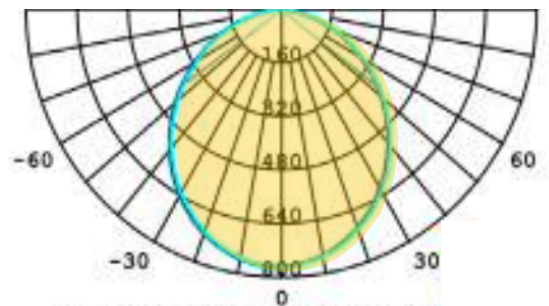

USAGE / APLICACIÓN	Surface Mounted LED Panel Light / Panel LED Superficial					
TECHNOLOGY / TECNOLOGÍA	LED					
AVAILABLE OPTIONS / OPCIONES DISPONIBLES	18W	3000K	110-277V	D-22cm	2070Lm	7991
	18W	4000K	110-277V	D-22cm	2070Lm	
	18W	6500K	110-277V	D-22cm	2070Lm	
	18W-SM*	6500K	110-277V	D-22cm	2070Lm	
IP RATING	IP44					
FINISH	Aluminium White / Aluminio Blanco					
ADDITIONAL INFORMATION / INFORMACIÓN ADICIONAL	<ul style="list-style-type: none"> ▪ Epistar Chip ▪ 120° Beam Angle / Ángulo de Apertura ▪ 30,000 Hours Long Life ▪ *SM: with Motion Sensor 					

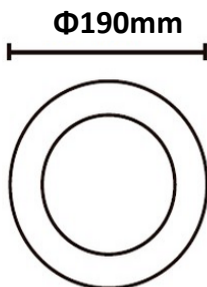

Certifications:



Drivers and Chips:



LightSource

For more information, contact: info@lightsourcelight.com